



# MICRONETIXX COMMUNICATIONS



- **Low Group Delay True Center Fed Design**
- **Wide Range of Standard And Custom Azimuth Patterns**
- **Available In 8 To 36 Bay Models, In 2 Bay Increments**
- **7.5 to 65 kW Input Power Ratings**
- **Horizontal, Elliptical and Circular Polarization**

## **CS Series UHF Side Mount Slot Antennas**

Micronetixx Communications offers a complete line of side mounted UHF slot antennas available from 400 to 1500 MHz (Band IV). The three base CS series models have power input ranges from 7.5 to 65 kW average power. The CS series antennas are true center fed to provide the lowest group delay characteristics, and to provide a flat low V.S.W.R. profile over a 6 or 8 MHz band. The antennas are built in two bay increments, allowing you to get the exact elevation gain you need. Each antenna is custom built to the beam tilt and null fill specifications needed to ensure the best coverage. A wide range of azimuth patterns available, along with the choice of elliptical, circular, or horizontal polarization.

---

## 2030 Series – Low Power

The 2030 series of antennas are low power UHF slot antennas, with a standard input rating of 7.5 kW average. The 2030 antennas are center fed and have a 3-1/8" EIA input flange. Some of the 2030 series of antennas may be customized to provide a 12.5 kW input rating. The antennas are true center fed to provide the lowest group delay performance. No external cables or power dividers are needed with this design.



Typical 2030 series feed point

The 2030 series antennas come in a wide variety of standard and custom azimuth patterns. The 2030 series antennas are available in two bay increments from 8 to 32 bays, with either single or dual channel bandwidth. Each antenna is built to custom beam tilt and null fill specifications, with a choice of horizontal, elliptical or circular polarization. Stainless steel mounting brackets are standard.

## 2050 Series – Medium Power

The 2050 series of medium power antennas are built the same way the 2030 series is, and use a 4-1/16" EIA Flange input to achieve an input power rating of 25 kW average. Some 2050 series antennas may be customized with up to a 40 kW input power rating. A typical 24 bay 2050 antenna with a cardioid pattern will produce an ERP of over 1000 kW. Standard and extended radomes options are available on a number of 2050 antenna designs.


## 2070 Series – High Power

The 2070 series is our highest power side antenna, and shares the same attributes of the 2030 and 2050 series. The 2070 series has a 65 kW input power rating, using a 6-1/8" EIA Flange. The 2070 series antennas are also available in 75 Ohm versions, and with a 7-3/16" Input.

---


# Sample Azimuth Patterns

Azimuth Pattern B Rotated 0 Degrees

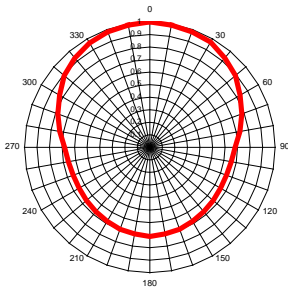


B Pattern – Gain 1.70 (2.30 dB)

Azimuth Pattern F Rotated 0 Degrees

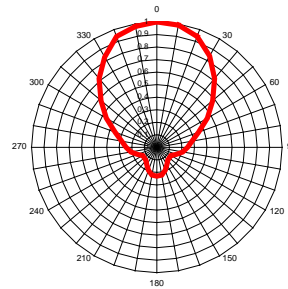


F Pattern – Gain 3.80 (5.80 dB)

Azimuth Pattern G Rotated 0 Degrees

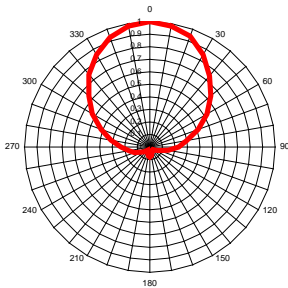


G Pattern – Gain 3.60 (5.56 dB)

Azimuth Pattern 5771 Rotated 0 Degrees

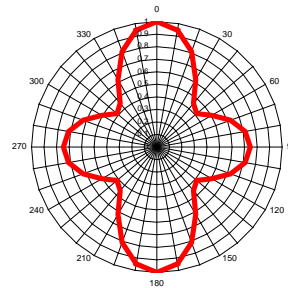


2771 Pattern – Gain 2.10 (3.22 dB)

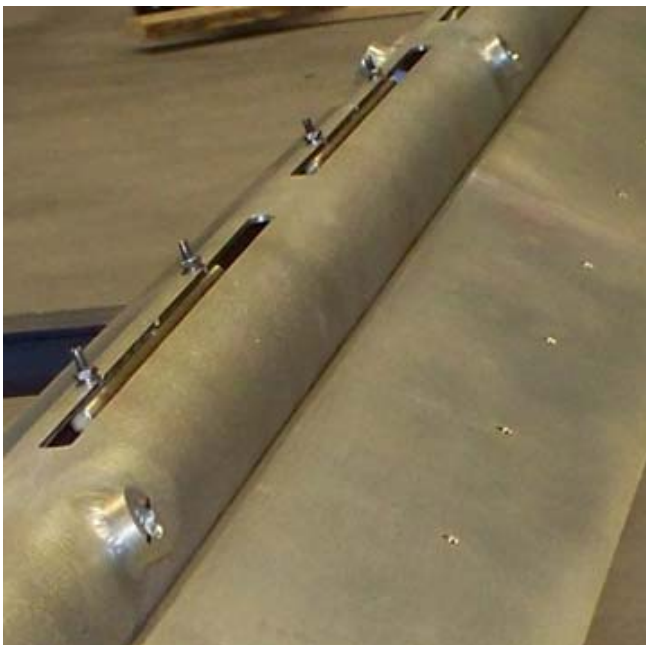


The picture to the left is a “D” pattern cardioid 2030 series antenna without the radome.

Azimuth Pattern D Rotated 0 Degrees

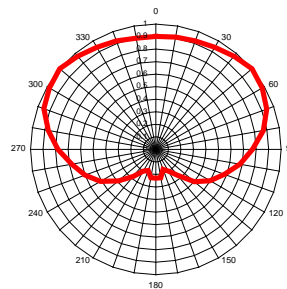


D Pattern – Gain 1.90 (2.70 dB)

# Sample Elevation Patterns

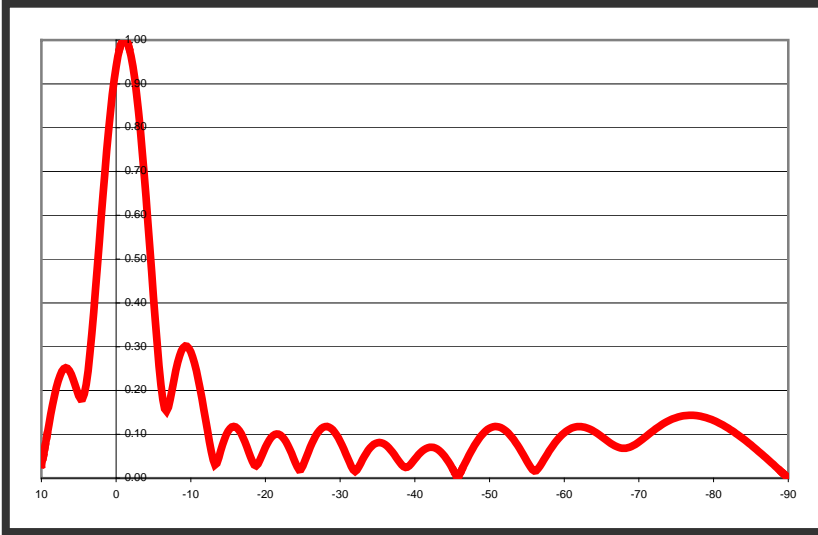


10 Bay 1.2 Degree Beam  
Tilt. Gain 10.44 (10.18 dB)

14 Bay 0.6 Degree Beam  
Tilt. Gain 14.40 (11.58 dB)

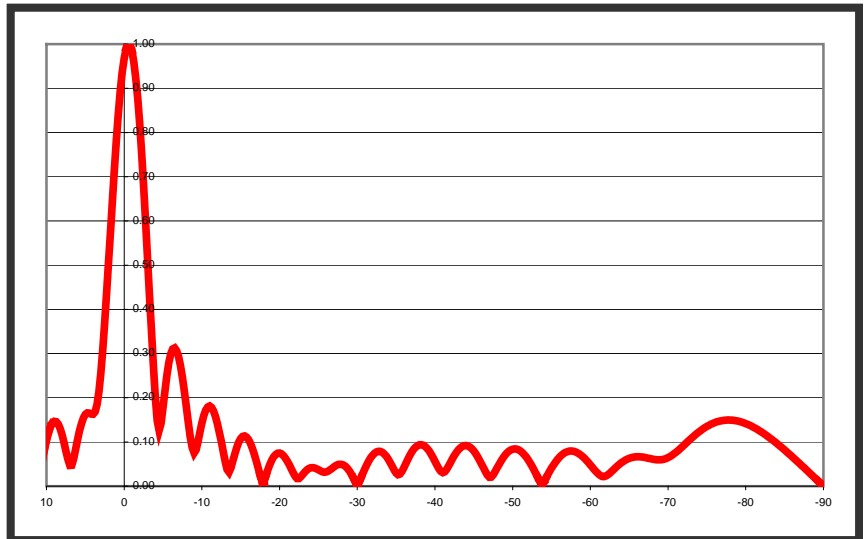

22 Bay 0.6 Degree Beam  
Tilt. Elevation Gain 22.50  
(13.52 dB)

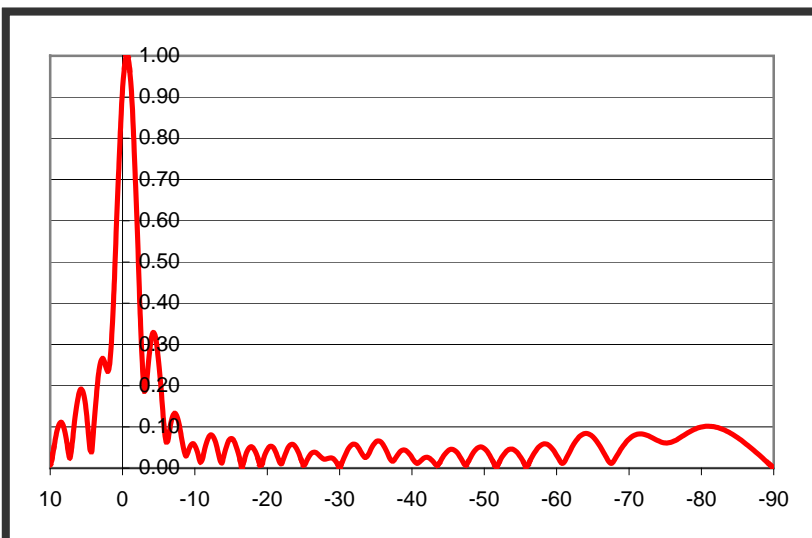



# CS Series Antenna Options

Each CS series antenna is built to the customer's specifications in two bay increments, A 14, 18, or 22 bay antenna that other manufacturers do not offer, is standard product to us. In addition to our full range of bay sizes, the CS antennas are available in a wide range of azimuth patterns. In many cases, to maximize coverage for a client, we can modify or customize an azimuth pattern.

ATSC-M/H transmission is optimized with the use of circular or elliptical polarized antennas. We can build the CS series with a vertical component from 20% to 100%. In many cases, going to elliptical or circular polarization only adds 10 pound of weight with no increase in wind load area.

For transmission sites with high environment conditions, we can customize the radome system to extend it out farther from the slots. The CS series antennas use rugged UV stabilized Polyethylene for the radome. International Orange, Light Gray and White radomes are available.

Some of the CS series antennas can be built for dual or even triple channel operation. In many cases we can also split feed the antennas, using a power divider and two matched transmission lines.

The CS series antennas are built using aluminum pylons, and parastitics, which are finished with a class 1A chromate treatment. For applications where building codes call for a painted structure, the antennas can be supplied painted to spec, or they can be field painted.



70 Commercial Street ~ Lewiston, ME 04240 V 207-784-2820  
[www.micronetixxantennas.com](http://www.micronetixxantennas.com)